




FLRC-S/II

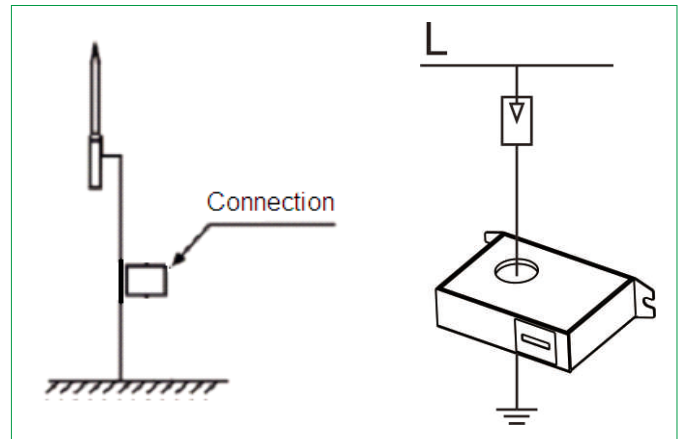

- ◆ Analogue type lightning counter.
- ◆ 6 digits display (0~999999).
- ◆ Long service life due to No battery need.
- ◆ Maintenance free.
- ◆ Counting accurately.
- ◆ Sensitive response and wide lightning current measuring range.
- ◆ Easy to install and use.
- ◆ Can be used together with all kinds of lightning protectors and equipment.

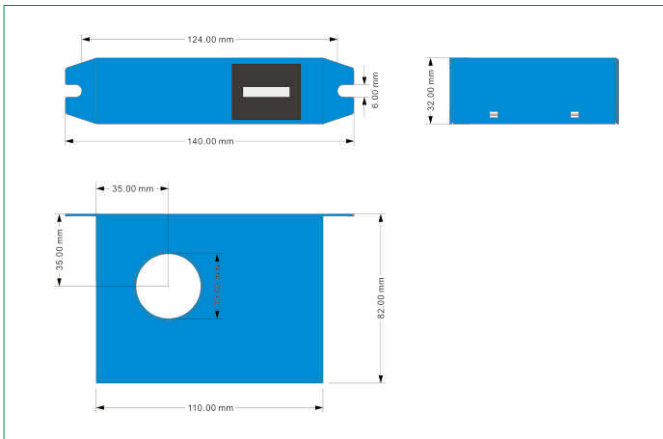

Model No.	FLRC-S/II
Minimum Current Sensitivity (rise time $\geq 8\mu s$)	>350A
Maximum Detectable Current (I _{max})	100kA
Sequence of impulse	> 1s
Display Model	Electromechanical Counter
Indicator	Lightning Event 0~999999
Current Sample Mode	Inductive Probe (Built-in)
Working mode	No battery / No power supply needed
Operation temperature (°C)	-20°C~+70°C
Dimension of installation window (mm)	30mm
Dimension of counter (mm)	110x33x82mm
Enclosure material	Metal plate
Net Weight	0.46kg