



FLRC-S/R

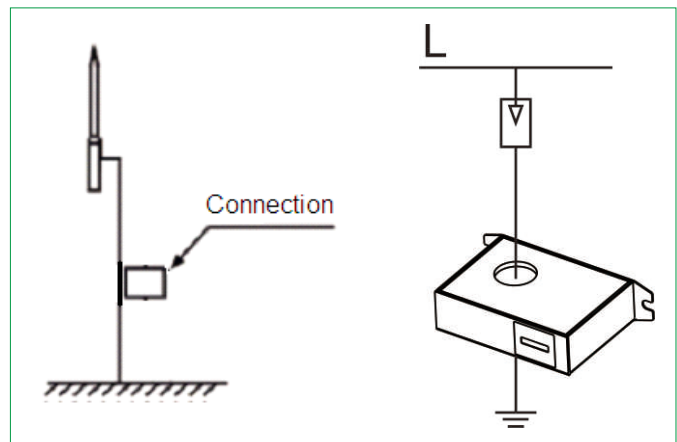

- ◆ Analogue type lightning counter.
- ◆ 4 digits display (0~9999).
- ◆ With reset function by press a button to clear the number to "0".
- ◆ No need battery / power supply.
- ◆ Metal plate. Easy installation and use.
- ◆ Installation window ---30mm.
- ◆ Sensitive response and wide lightning current measuring range.
- ◆ Can be used with all kinds of lightning and surge protectors and equipment.

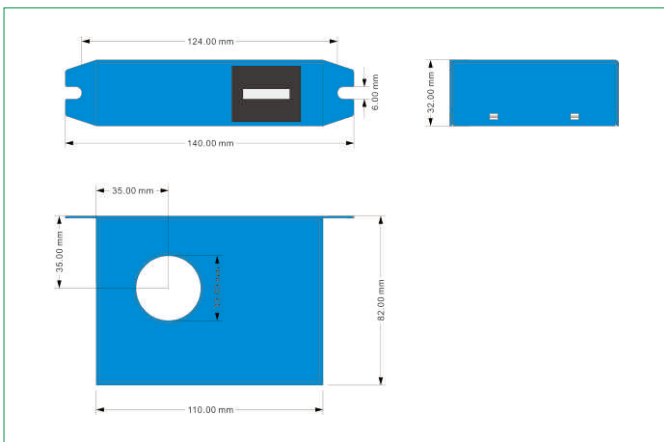

Model No.	FLRC-S/R
Minimum Current Sensitivity (rise time $\geq 8\mu s$)	>350A
Maximum Detectable Current (Imax)	100kA
Sequence of impulse	> 1s
Display Model	Electromechanical Counter
Indicator	Lightning Event 0~9999
Reset function	Press one button to clear display number to "0"
Current Sample Mode	Inductive Probe (Built-in)
Working mode	No battery / No power supply needed
Operation temperature (°C)	-20°C~+70 °C
Dimension of installation window (mm)	30mm
Dimension of counter (mm)	110x33x82 mm
Enclosure material	Metal plate
Net Weight	0.46kg